



DL2 Integrated LED Loading Dock Arm

Innovative. Modern. Streamlined.

Model Numbers

24" Integrated LED Loading Dock Arm
DL2-SA-IL-24



36" Integrated LED Loading Dock Arm
DL2-SA-IL-36



40" Integrated LED Loading Dock Arm
DL2-DA-IL-40



48" Integrated LED Loading Dock Arm
DL2-DA-IL-48



60" Integrated LED Loading Dock Arm
DL2-DA-IL-60



Integrated LEDs are built into the dock arm — no light head required!

Specifications

Wattage	13.4W
Power Source	120V, 60Hz
Lumens	1331
Beam Angle	10°
CRI	≥ 75
CCT	5000K
Life	100,000 hours at 70% lumen maintenance
Compliances	cULus listed, LM79 report available upon request
Warranty	3 years

How To Order

The **Integrated LED Loading Dock Arm** is designed to be used without a light head or additional accessory. Contact Tri Lite at (800) 322-5250 or (773) 384-7765, or by email at info@triliteinc.com to place an order using the model numbers indicated above.

Made in USA  Patented Design










DL2 Integrated LED Loading Dock Arm

Innovative. Modern. Streamlined.

Single Arm Lengths

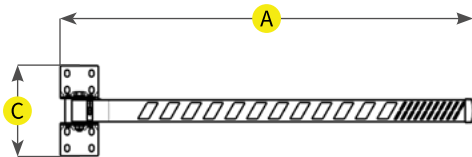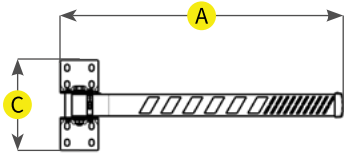

Double Arm Lengths

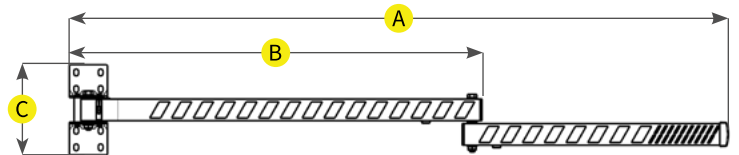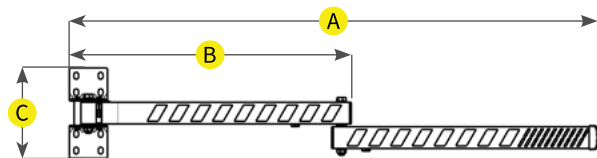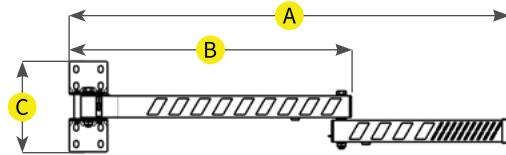

Model	A	B	C	D	Accessories
DL2-SA-IL-24 (24" Single Arm)	24 in (610 mm)	N/A	8.5 in (216 mm)	8.5 in (216 mm)	N/A
DL2-SA-IL-36 (36" Single Arm)	36 in (915 mm)	N/A	8.5 in (216 mm)	8.5 in (216 mm)	N/A
DL2-DA-IL-40 (40" Double Arm)	40 in (1016 mm)	24 in (610 mm)	8.5 in (216 mm)	8.5 in (216 mm)	N/A
DL2-DA-IL-48 (48" Double Arm)	48 in (1219 mm)	24 in (610 mm)	8.5 in (216 mm)	8.5 in (216 mm)	N/A
DL2-DA-IL-60 (60" Double Arm)	60 in (1524 mm)	36 in (915 mm)	8.5 in (216 mm)	8.5 in (216 mm)	N/A





DL2 Loading Dock Arms & LED Light Heads

Innovative. Modern. Streamlined.

Model Numbers

24" Loading Dock Arm
DL2-SA-24



36" Loading Dock Arm
DL2-SA-36



40" Loading Dock Arm
DL2-DA-40



48" Loading Dock Arm
DL2-DA-48



60" Loading Dock Arm
DL2-DA-60



Heavy Duty LED Light Head

HDL2 (no switch)
HDL2-S (switch)

Polycarbonate LED Light Head

PL2 (no switch)
PL2-S (switch)

3-Speed Fan

DLFAN

Heavy Duty
LED Light Head



Polycarbonate
LED Light Head



3-Speed Fan



Specifications

Wattage	13.4W
Power Source	120V, 60Hz
Lumens	1331
Beam Angle	10°
CRI	≥ 75
CCT	5000K
Life	100,000 hours at 70% lumen maintenance
Material	Cast aluminum (HDL2, HDL2-S); Polycarbonate (PL2, PL2-S)
Compliances	cULus listed, IP66 rated (HDL2), LM79 report available upon request
Warranty	3 years

How To Order

The **DL2 Loading Dock Arm** is designed to be used with an **LED Light Head**. If you intend to use a Tri Lite LED Light Head with a loading dock arm other than the DL2 Series, we recommend purchasing the version with a switch. Contact Tri Lite at (800) 322-5250 or (773) 384-7765, or by email at info@triliteinc.com to place an order using the model numbers indicated above.

Made in USA  Patented Design










DL2 Loading Dock Arms & LED Light Heads

Innovative. Modern. Streamlined.

Single Arm Lengths

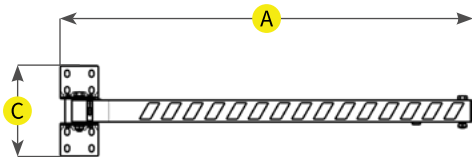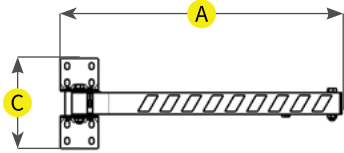

Double Arm Lengths

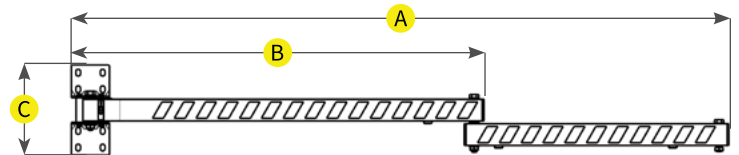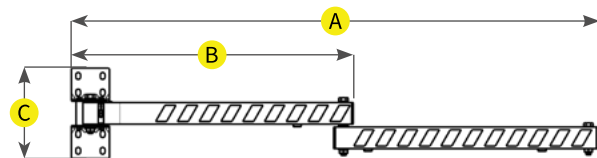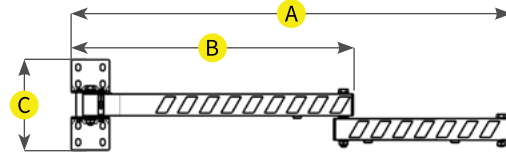

Model	A	B	C	D	Accessories
DL2-SA-24 (24" Single Arm)	24 in (610 mm)	N/A	8.5 in (216 mm)	8.5 in (216 mm)	HDL2, HDL2-S, PL2, PL2-S, DLFAN
DL2-SA-36 (36" Single Arm)	36 in (915 mm)	N/A	8.5 in (216 mm)	8.5 in (216 mm)	HDL2, HDL2-S, PL2, PL2-S, DLFAN
DL2-DA-40 (40" Double Arm)	40 in (1016 mm)	24 in (610 mm)	8.5 in (216 mm)	8.5 in (216 mm)	HDL2, HDL2-S, PL2, PL2-S, DLFAN
DL2-DA-48 (48" Double Arm)	48 in (1219 mm)	24 in (610 mm)	8.5 in (216 mm)	8.5 in (216 mm)	HDL2, HDL2-S, PL2, PL2-S, DLFAN
DL2-DA-60 (60" Double Arm)	60 in (1524 mm)	36 in (915 mm)	8.5 in (216 mm)	8.5 in (216 mm)	HDL2, HDL2-S, PL2, PL2-S, DLFAN

